

LAW OFFICES

LERNER, DAVID, LITTENBERG, KRUMHOLZ & MENTLIK, LLP

600 SOUTH AVENUE WEST

WESTFIELD, NEW JERSEY 07090-1497

(908) 654-5000

FAX: (908) 654-7866

PATENTS, TRADEMARKS AND COPYRIGHTS

March 19, 1999

MICHAEL H. TESCHNER
GREGORY S. GEWIRTZ
JONATHAN A. DAVID
SHAWN P. FOLEY
JOHN P. MALDIJIAN
THOMAS M. PALUSH
STEPHEN F. ROTH
KIMBERLY V. FLUG-ODER
JASON I. GARRELL
JASON D. SHANEK
RENEE M. ROBERTSON
BRIAN K. JOHNSON
LINNE A. BORCHERS

OF COUNSEL
LAWRENCE I. LERNER
DANIEL H. BOBIS
W. DREW KASTNER

*NORTH CAROLINA BAR ONLY

BOX PATENT APPLICATION
Assistant Commissioner For Patents
Washington, D.C. 20231

File No.: WNX 3.0-008
Inventor(s): Hideo Kojima
Title : IMAGE PROCESSING MOTHOD, VIDEO GAME APPARATUS AND STORAGE MEDIUM

Dear Sir:

Enclosed herewith please find the following documents in the above-identified application for Letters Patent of the United States:

1	Pages of Abstract	Unexecuted Declaration (executed Declaration to follow)
25	Pages of Specification	One (1) return-addressed postcard
42	Number of Claims	PLEASE PROVIDE FILING DATE AND SERIAL NUMBER
8	Sheets of Drawings <input checked="" type="checkbox"/> A4 <input type="checkbox"/> 11"	

Please charge Deposit Account No. 12-1095 in the amount of \$1,234.00, calculated as follows:

Basic Fee		\$	760.00
Additional Fees:			
Total number of claims (including multiple dependent claims):	42		
Total number of claims in excess of 20:	22 x \$18		396.00
Number of independent claims:	4		
Number of independent claims minus 3:	1 x \$78		87.00
Fee for multiple dependent claim(s) (\$260)			0.00
TOTAL FILING FEE		\$	1,234.00

CONVENTION DATE: 3/19/98 for Apph. S.N. 10-70991 is claimed.
Priority Document: ☒ Enclosed ☐ Will follow

In the event the actual fee is greater than the payment authorized above, the Patent Office is authorized to charge any deficiency to our Deposit Account No. 12-1095.

Respectfully submitted,

LERNER, DAVID, LITTENBERG,
KRUMHOLZ & MENTLIK, LLP

LB (LBUNEX) 98022

STEPHEN B. GOLDMAN

Reg. No. 28,512

EXPRESS MAIL LABEL NUMBER: EL188332158US

IMAGE PROCESSING METHOD, VIDEO GAME APPARATUS
AND STORAGE MEDIUM

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to an image processing technique which is applicable to a video game apparatus for enhancing

10 attractiveness of a game.

DESCRIPTION OF THE RELATED ART

In recent years, role-playing game apparatuses or softwares have been actively developed, wherein, for example, a player operates motion of a player character appearing in a game so that the player character
15 fights a counterpart character. In recent video game apparatuses, attractiveness is enhanced by, not only operating motion of a player character, but also making a game itself storyful as well as using a three-dimensional Computer Graphic (CG) image processing technique to express motion of a player character and a counterpart character and
20 change of scene images in a more realistic fashion. According to the conventional video game apparatuses, the motion of the characters and the scene images are displayed on an external display unit, a television or the like while being expressed in bird's eye or air views at predetermined viewpoint positions and in predetermined visual fields.

25 Further, sound effects produced during operation of the player character are such that predetermined tones are outputted at

predetermined scenes.

In the player-joining-type video game apparatuses typified by the role-playing game apparatuses, scene images are normally produced according to operation of the player character by the player wherein the player can feel as if the player acted and fought the counterpart character on a video display screen. In such video game apparatuses, when playing, for example, a storyful video game with tense scenes, it is effective to allow the player to experience a feeling of tension for enhancing attraction for the game.

However, as described above, in the conventional video game apparatuses, the motion of the characters and the scene images are reproduced at the predetermined viewpoint positions and the predetermined sound effect is produced per scene. Thus, it is difficult to render the player effectively experience the state of tension.

SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide an image processing method which can diversify expressing manners of characters and scene images.

It is another object of the present invention to provide a video game apparatus which can enhance attraction for a game using the foregoing diversified expressing manners.

It is another object of the present invention to provide a storage medium for realizing the foregoing image processing method or the foregoing video game apparatus using a computer.

According to one aspect of the present invention, there is provided an image processing method executed by a computer, comprising the

steps of detecting a display position and motion of a character on a display unit; selectively producing one of a first scene image and a second scene image based on the detected display position and motion of the character, the first scene image subjectively viewed by the
5 character, and the second scene image objectively viewing the motion of the character; and displaying the produced one of the first and second scene images on the display unit.

It may be arranged that a movement command is accepted when producing the second scene image so that a moving image of the
10 character is produced based on the accepted movement command, while the movement command is unacceptable when producing the first scene image.

It may be arranged that when it is detected that the character is located at a wall a region behind which can not be seen, a scene image
15 objectively viewing the character and the region is produced.

It may be arranged that a command for movement of the character along the wall is accepted, and a moving image of the character is produced based on the accepted movement command.

It may be arranged that when the character is hidden by a given
20 thing in the second scene image, the first scene image is produced regardless of movement of the character.

It may be arranged that a radar image is produced and displayed on the display unit, the radar image showing a relative position and a visual field of the character and a relative position and a visual field of a
25 counterpart character which is possible to fight the character.

It may be arranged that when the character gets in the visual field

0022457.021009

detection that the character is located at a wall a region behind which can not be seen, produces a fourth scene image objectively viewing the character and the region.

It may be arranged that the video game apparatus further
5 comprises a command accepting section which accepts a command for movement of the character along the wall and produces a moving image of the character based on the accepted movement command.

It may be arranged that the video game apparatus further
10 comprises a sound effect producing section which produces different sound effects depending on which of the first, second, third and fourth scene images is displayed.

It may be arranged that when the character is hidden by a given thing in the third scene image, the scene image producing section produces the second scene image.

15 It may be arranged that the scene image producing section produces a radar image and displays the radar image on the display unit, the radar image showing a relative position and a visual field of the character and a relative position and a visual field of a counterpart character which is possible to fight the character.

20 It may be arranged that when the character gets in the visual field of the counterpart character, the scene image producing section changes a color of the radar image.

It may be arranged that the video game apparatus further
25 comprises an item displaying section which, in a scene where the character can selectively use one of items, displays the items so as to be scrolled in sequence for allowing the player to select one of the items.

0022467.031099

It may be arranged that the scene image producing section comprises an exchangeable memory and a reading section for the memory, and that the memory stores image element data necessary for producing the character and the first, second and third scene images.

- 5 It may be arranged that the image element data is element data for producing a three-dimensional CG image.

- According to another aspect of the present invention, there is provided a video game apparatus comprising a controller for operating motion of a character; a scene image producing section which produces
10 the character whose motion is operated by the controller and a scene image which changes according to a position and the motion of the character, and displays the character and the scene image on a display unit; and a sound effect producing section which produces a sound effect corresponding to the position and motion of the character,
15 wherein the scene image producing section produces a first scene image when the character is stopped in a movable state and a second scene image when the character is moved, the first scene image subjectively viewed by the character and the second scene image objectively viewing the motion of the character, the scene image producing section
20 displaying the produced one of the first and second scene images on the display unit, and wherein the sound effect producing section produces different sound effects depending on which of the first and second scene images is displayed.

- It may be arranged that the video game apparatus further
25 comprises a command accepting section which accepts a movement command when the second scene image is displayed so that a moving

image of the character is produced based on the accepted movement command, while refuses the movement command when the first scene image is displayed.

It may be arranged that the scene image producing section, upon
5 detection that the character is located at a wall a region behind which
can not be seen, produces a scene image objectively viewing the
character and the region.

It may be arranged that the video game apparatus further
comprises a command accepting section which accepts a command for
10 movement of the character along the wall and produces a moving image
of the character based on the accepted movement command.

It may be arranged that when the character is hidden by a given
thing in the second scene image, the scene image producing section
produces the first scene image regardless of movement of the character.

15 It may be arranged that the scene image producing section
produces a radar image and displays the radar image on the display unit,
the radar image showing a relative position and a visual field of the
character and a relative position and a visual field of a counterpart
character which is possible to fight the character.

20 It may be arranged that when the character gets in the visual field
of the counterpart character, the scene image producing section
changes a color of the radar image.

It may be arranged that the sound effect producing section
produces a different sound effect when the scene image producing
25 section changes the color of the radar image.

It may be arranged that the video game apparatus further

0022457.031000

comprises an item displaying section which, in a scene where the character can selectively use one of items, displays the items so as to be scrolled in sequence for allowing selection of one of the items.

- It may be arranged that the scene image producing section
- 5 comprises an exchangeable memory and a reading section for the memory, and that the memory stores image element data necessary for producing the character and the first and second scene images.

It may be arranged that the image element data is element data for producing a three-dimensional CG image.

- 10 According to another aspect of the present invention, there is provided a computer-readable recording medium storing a program which causes a computer to execute a process of detecting motion of a character to be displayed; a subjective mode process of producing a first scene image subjectively viewed by the character while stopped in a
- 15 movable state; an intrude mode process of producing a second scene image subjectively viewed by the character while moving; a bird's eye view mode process of producing a third scene image objectively viewing the character and the motion of the character; and a process of switching among the subjective mode process, the intrude mode process
- 20 and the bird's eye view mode process according to the motion of the character so as to display corresponding one of the first, second and third scene images on a display unit.

- It may be arranged that the program causes the computer to produce different sound effects depending on which of the first, second
- 25 and third scene images is produced.

It may be arranged that the subjective mode process and the

00272457.021900

bird's eye view mode process are switched therebetween based on an external command.

It may be arranged that when the character is hidden by a given thing in the bird's eye view mode process, the bird's eye view mode
5 process is automatically switched to the intrude mode process.

It may be arranged that the program causes the computer to execute a process of accepting a command for movement of the character in each of the intrude mode process and the bird's eye view mode process so as to move the character, while refusing the movement
10 command in the subjective mode process.

It may be arranged that the program causes the computer to further execute a behind mode process which, upon detection that the character is located at a wall a region behind which can not be seen, produces a scene image objectively viewing the character and the region.

It may be arranged that the program causes the computer to execute a process of accepting a command for movement of the character along the wall so as to move the character.
15

It may be arranged that the program causes the computer to execute a process of producing a radar image and displaying the radar
20 image on the display unit, the radar image showing a relative position and a visual field of the character and a relative position and a visual field of a counterpart character which is possible to fight the character.

It may be arranged that the program causes the computer to execute a process of changing a color of the radar image when the
25 character gets in the visual field of the counterpart character.

It may be arranged that the program causes the computer to

00072467-031009

produce a different sound effect when the color of the radar image is changed.

It may be arranged that the program causes the computer to execute a process of displaying a plurality of items so as to be scrolled in sequence on the display unit, the items selected and used by the character.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will be understood more fully from the detailed description given hereinbelow, taken in conjunction with the accompanying drawings.

In the drawings:

Fig. 1 is a block diagram showing a hardware structure of a basic apparatus to which the present invention is applied;

Fig. 2 is a functional block diagram of a video game apparatus according to a preferred embodiment of the present invention;

Fig. 3 is an explanatory diagram showing a radar image as an example of an interface image;

Fig. 4 is an explanatory diagram showing an interface image for item selection which is displayed when shifted to a fighting scene;

Fig. 5 is a diagram showing an image display example according to a first person view mode process;

Fig. 6 is a diagram showing the state wherein a player character crawls under a tank in a bird's eye mode;

Fig. 7 is a diagram showing an image display example when a bird's eye view mode process is shifted to an intrude mode process in the state of Fig. 6;

Fig. 8 is a diagram showing an image display example according to a behind mode process;

Fig. 9 is a diagram showing an image display example according to an alert mode process;

5 Fig. 10 is a diagram showing an image display example according to an evasion mode process;

Fig. 11 is a flowchart showing a basic mode processing procedure according to the preferred embodiment of the present invention; and

10 Fig. 12 is a flowchart showing an alert/evasion/invasion mode processing procedure according to the preferred embodiment of the present invention.

DESCRIPTION OF THE PREFERRED EMBODIMENT

Now, a video game apparatus according to a preferred embodiment of the present invention will be described hereinbelow with
15 reference to the accompanying drawings.

In this embodiment, the video game apparatus is a three-dimensional CG game apparatus, wherein there appear a player character invading the enemy's territory to achieve a given purpose, various facilities and installations arranged in the enemy's territory and
20 a plurality of counterpart characters who fight the player character with empty hands or with weapons when the player is found in the facilities.

The video game apparatus is realized when a program (program codes) stored in a CD-ROM as one example of a storage medium is read into a basic apparatus being a computer. Specifically, the program is
25 stored in the CD-ROM in a computer-readable fashion for allowing the basic apparatus to execute later-described various processes.

Hereinafter, this program will be referred to as "game program". In the following description, it is assumed that the game program also includes data and control parameters necessary for execution thereof.

Now, the basic apparatus will be first described hereinbelow.

5 The basic apparatus reads out the game program and three-dimensional image element data from the foregoing CD-ROM which is exchangeable and portable, and carries out execution thereof so as to produce three-dimensional CG images representing various characters and scene images, display them on a display unit 25 and control the
10 displaying. As the basic apparatus, one described in, for example, U.S. Patent 5,757,376 can be used.

As shown in Fig. 1, a basic apparatus 1 comprises a main control section 10, an image processing section 20, a sound control section 30, a disk control section 40, a communication control section 50 and a
15 main bus B connecting the foregoing functional blocks 10 to 50 to allow two-way communications among them.

The main control section 10 comprises a CPU 11, a peripheral device controller 12 for carrying out an interrupt control, a direct memory access (DMA) transfer control, etc., a main memory 13 for
20 temporarily storing the game program, the image element data, etc., and a ROM 14 storing an operating system (OS) etc. for managing the image processing section 20, the sound control section 30, etc. The CPU 11 is a RISC (reduced instruction set computer) CPU, executing the OS stored in the ROM 14 to control the basic operation of the whole apparatus and
25 further executing the game program stored in the main memory 13 to realize a plurality of functional blocks which will be described later.

so forth. Given such functions, the SPU 31 can be used as a sampling tone generator for producing sound effects, background tones, background music (BGM), etc. based on tone generator data stored in the sound buffer 32.

5 The disk control section 40 comprises a disk drive 41 for reproducing the game program and the other data stored in a CD-ROM 44, a CD-ROM decoder 42 for decoding the reproduced data when error correcting codes (ECC) are added thereto, and a CD-ROM buffer 43 for temporarily storing the reproduced data from the disk drive 41 before
10 storing them into the main memory 13. The CD-ROM decoder 42 constitutes a part of the sound control section 30. An audio output from the CD-ROM decoder 42 is once inputted into the SPU 31 where it is mixed with an SPU output, and then inputted into a reverb unit so as to be a final audio output.

15 The communication control section 50 comprises a communication control device 51 for controlling communication with the CPU 11 via the main bus B, a controller 52 and a memory card 53 for storing the setting of a game etc.

 The controller 52 is an interface for inputting operation contents
20 by the player and includes a start key for commanding the start or restart of a game, a reset key for commanding the reset of the game, a selection key for commanding movement of a character in longitudinal and transverse directions and moving a cursor to desired one of menus or items, a command key for commanding detailed motion of the
25 character and commanding a selected menu, and so forth. The controller 52 transmits the state of each key to the communication

control device 51 in synchronous communication. The commands for the longitudinal and transverse movements of the character can be inputted using, for example, a cross-shaped key provided on a handheld box or a joystick.

5 The communication control device 51 notifies the state of each key of the controller 52 to the CPU 11. In this fashion, the commands from the player are given to the CPU 11 so that the CPU 11 performs an image displaying process and a game developing process based on the executing game program according to the commands from the player.

10 If the setting of a game progressing according to a game scenario, the final or intermediate result of the game or the like needs to be stored, the CPU 11 sends the necessary data to the communication control device 51 which then stores the data sent from the CPU 11 into the memory card 53. Since the memory card 53 is separated from the main
15 bus B, it can be loaded or unloaded with the power being on.

 The basic apparatus 1 further comprises a parallel input/output (I/O) port 61 and a serial input/output (I/O) port 62 connected to the main bus B, respectively. Connection to a peripheral device can be achieved via the parallel I/O port 61, while connection to another video
20 game apparatus can be achieved via the serial I/O port 62.

 In the foregoing basic apparatus 1, when the power gets on or a reset process is executed while the CD-ROM 44 is loaded in the disk drive 41, the CPU 11 executes the OS stored in the ROM 14 to first initialize the whole apparatus, then control the disk control section 40
25 to read out the game program stored in the CD-ROM 44 and transfer it into the main memory 13, and then execute it. In this event, the image

09272457-031909

element data etc. are also read into the main memory 13 upon occasion. Through the execution of the game program, the CPU 11 realizes the functional blocks as shown in Fig. 2 so that the video game apparatus generally designated by numeral 2 is presented.

5 As shown in Fig. 2, the video game apparatus 2 comprises a command analyzing section 211, a player character position/motion detecting section 212, an image managing section 213 and a tone generator managing section 217.

 The command analyzing section 211 analyzes command data
10 inputted from the controller 52 via the communication control device 51 so as to execute required data controls. The command data include, for example, a command for start/stop/restart/end of the game, a command for motion of a character to be operated by the player (hereinafter referred to as "player character"), and a command for item
15 selection which will be described later. When, for example, the game start command is inputted, the command analyzing section 211 loads into the main memory 13 the game program and the data stored in the CD-ROM 44 so as to arrange environments necessary for execution of the game. Further, upon detection of the game stop command, the
20 command analyzing section 211 saves into the memory card 53 data representing the progressing state of the game as described above. On the other hand, upon detection of the command for motion of the player character, the command analyzing section 211 sends the contents of the command to the player character position/motion detecting section
25 212.

 Based on the contents of the foregoing motion command, the

control section 30 to produce a sound effect corresponding to each of the mode processes.

The image interface control section 215 produces an interface image to be displayed on the display unit 25 in a superimposed fashion, and performs switching of a display manner of the interface image. The display command section 216 outputs to the image processing section 20 a display command based on produced display data of a scene image.

Fig. 3 is a radar image R as one example of an interface image produced by the image interface control section 215. The radar image R is, for example, displayed in semi-transparent green at the upper right of a display screen for allowing the player to see a relative position 311 and a field of vision 312 of a player character and relative positions 313 and a field of vision 314 of counterpart characters. The positions 313 and the a field of vision 314 of the counterpart characters are changed at random. When the player character gets in the field of vision 313 of the counterpart character, the color of the radar image R is changed stepwise, for example, from red to yellow according to the degree of danger, and further, a variation of the danger degree, a remaining time of that color and so on are displayed in the radar image R. If the remaining time is displayed, the player needs to operate the controller 52 so as to take a necessary measure within the displayed time.

In this embodiment, the image interface control section 215 produces an interface image for item selection when shifted to a fighting scene. The shift to the fighting scene occurs when a fight with a counterpart character becomes possible. The interface image for the item selection is, for example, as shown in Fig. 4, wherein empty hand

00272457-031999

example, when a counterpart character is located far away or when a sound is generated far away, a voice or sound is set to be small, then, as it approaches, a voice or sound is set to be larger.

This process is carried out only while the player operates a particular key or a joystick of the controller 52 when the player character is stopped in the state where the player character can freely move in the longitudinal and transverse directions.

The viewpoint position and the viewing direction in the subjective mode substantially coincide with those of the player character. In the subjective mode, commands for moving the player character in the longitudinal and transverse directions can not be inputted, but instead, when the player operates a key or joystick of the controller 52, the viewing direction changes correspondingly. Fig. 5 shows a scene image when the subjective mode is executed, which corresponds to the visual field 312 (see Fig. 3) of the player character.

(3) Intrude Mode Process

In the intrude mode process, data is produced for displaying a scene image viewed by the player character's viewpoint in the state where the player character is moved (intrude mode), and the tone generator managing section 217 is commanded to control the sound control section 30 like in the subjective mode process.

This process is automatically executed when the player character has moved to a position where the player character can not be seen in the bird's eye view mode, for example, in a duct, in or under an automobile or in a locker.

For example, Fig. 6 shows the state wherein the player character

crawls under a tank in the bird's eye view mode, but after having crawled under the tank, the player character can not be seen hidden behind the tank. In this case, as shown in Fig. 7, switching is automatically carried out to display a scene image viewed by the player
5 character from under the tank. This process can be realized by setting in advance positions of the player character corresponding to the foregoing conditions (moving to the position where the player character can not be seen in the bird's eye view mode, and the like).

The intrude mode is the same as the subjective mode in viewpoint
10 position and viewing direction, but differs from the subjective mode in that commands can be inputted for moving the player character in the longitudinal and transverse directions.

(4) Behind Mode Process

In the behind mode process, data is produced for displaying a
15 scene image in which the player character and a region behind a wall are viewed in a single display screen (behind mode), and the tone generator managing section 217 is commanded to control the sound control section 30 like in the subjective mode process. Upon touching against a wall, while moving, a region behind which can not be seen, the player
20 character automatically turns to face the back thereof toward the wall. If the player operates a particular key or a joystick of the controller 52 in this state, the image managing section 213 executes the behind mode process during a period of that operation. This eliminates necessity of getting a face of the player character out of the wall to confirm the region
25 behind the wall. This function is suitable for the role-playing game wherein the player character invades the enemy's territory to achieve

some purpose.

As shown in Fig. 8, in the behind mode, the viewpoint position is located at the slightly-lower front of the player character, while the viewing direction is a direction which captures the player character in the middle. The player can input commands for moving the player character in the transverse directions (along the wall).

(5) Invasion mode Process

In the invasion mode process, scene images change according to motion of the player character operated by the player while a radar image is displayed as shown in Fig. 3. In this process, a notification of "during invasion mode process" is given to the tone generator managing section 217 so that the sound control section 30 produces sound effects, background tones and BGM.

(6) Danger Mode Process

Shift to the danger mode process is automatically executed when, for example, the player character has moved into the field of vision of a counterpart character during the invasion mode process or was discovered by a counterpart character not displayed on the display unit 25 during the invasion mode process. In the danger mode process, the sound effects are changed to unique ones representing the state of danger. During the danger mode process, the color of a radar image is changed to red via the image interface control section 215. Further, the degree of danger is quantified according to the state and its variation and a remaining time (time limit) for escaping the danger mode process is calculated, so that the results of quantification and calculation are displayed in the radar image. Moreover, the item selection is allowed

using the interface image as shown in Fig. 4 so as to be prepared for fighting. Fig. 9 shows an example of an image displayed by the danger mode process.

(7) Evasion Mode Process

- 5 Shift to the evasion mode process is automatically executed when the player character gets out of the field of vision of the counterpart character during the danger mode process, meaning that the player character has escaped the state of danger for the present but is not safe yet. In the evasion mode process, the sound effects are changed to
- 10 unique ones. During the evasion mode process, the color of a radar image is changed to yellow via the image interface control section 215. Like in the danger mode process, the degree of danger is quantified according to the state and its variation and a remaining time (time limit) for shifting to the invasion mode process is calculated, so that the
- 15 results of quantification and calculation are displayed in the radar image. When the degree of danger is lowered to no greater than a given value, the evasion mode process is shifted to the invasion mode process.

- Now, the image processing method carried out by the foregoing video game apparatus 2 will be described based on a basic mode
- 20 processing procedure shown in Fig. 11 and an alert/evasion/invasion mode processing procedure shown in Fig. 12. It is assumed that the initial setting upon starting the game has been executed so that the environments for performing the game are in order. Although both processing procedures are mutually related to each other, they will be
- 25 separately explained for the sake of brevity.

In Fig. 11, as described before, a scene image is displayed

according to the bird's eye view mode just after the start of the game and BGM etc. are outputted via the tone generator managing section 217 (steps S101, S102). When the player inputs motion command data, a player character starts moving on the screen of the display unit 25
5 correspondingly. Simultaneously, a radar image is displayed in semi-transparent green at the upper right of the scene image. The player operates the player character while observing the radar image.

If the player character stops in the movable state (No at step S103), the bird's eye view mode process is shifted to the subjected mode
10 process (step S104). If the player character starts moving during the subjective mode process, the routine returns to step S102 where the bird's eye view mode process is again executed. On the other hand, if the player character has invaded a particular place during the bird's eye view mode process so that the player character can not be seen (Yes at
15 step S103; Yes at step S105), the intrude mode process is executed until the player character escapes that place (steps S106, S107). After having escaped, the routine returns to step S102 where the bird's eye view mode process is again executed.

If the player character has approached a wall or the like a region
20 behind which can not be seen (Yes at step S108), the behind mode process is executed until the player character gets away from the wall or the like (steps S109, S110). The foregoing processes are repeated according to a game scenario.

In Fig. 12, the invasion mode process is executed just after the
25 start of the game (step S201). If the player character gets in the field of vision of a counterpart character during the invasion mode process (Yes

at step S202), the invasion mode process is shifted to the danger mode process (step S203). Specifically, the degree of danger is calculated according to the state (step S204), and the display contents of the radar image are changed (step S205). If the state is changed through the operation by the player so that the degree of danger is lowered, the danger mode process is shifted to the evasion mode process (Yes at step S206; step S207). During the evasion mode process, the radar image is changed to the state unique to the evasion mode process (step S208). If the degree of danger increases during the evasion mode process (Yes at step S209), the routine returns to execute steps S203 to S208. On the other hand, if the degree of danger becomes no greater than a given value (No at step S209; Yes at step S210), the routine returns to step S201 where the invasion mode process is executed. The foregoing processes are repeated according to the game scenario.

While the present invention has been described in terms of the preferred embodiment, the invention is not to be limited thereto, but can be embodied in various ways without departing from the principle of the invention as defined in the appended claims. For example, the present invention is applicable to not only the foregoing fighting type role-playing game, but also other video games which require diversified expressing manners as described above.

WHAT IS CLAIMED IS:

1. An image processing method executed by a computer, comprising the steps of:

5 detecting a display position and motion of a character on a display unit;

selectively producing one of a first scene image and a second scene image based on the detected display position and motion of said character, said first scene image subjectively viewed by said character,
10 and said second scene image objectively viewing the motion of said character; and

displaying the produced one of said first and second scene images on said display unit.

15 2. The image processing method according to claim 1, wherein a movement command is accepted when producing said second scene image so that a moving image of said character is produced based on the accepted movement command, while the movement command is unacceptable when producing said first scene image.

20

3. The image processing method according to claim 1, wherein when it is detected that said character is located at a wall a region behind which can not be seen, a scene image objectively viewing said character and said region is produced.

25

4. The image processing method according to claim 3, wherein a

00272467-031999

command for movement of said character along said wall is accepted, and a moving image of said character is produced based on the accepted movement command.

5 5. The image processing method according to claim 1, wherein when said character is hidden by a given thing in said second scene image, said first scene image is produced regardless of movement of said character.

10 6. The image processing method according to claim 1, wherein a radar image is produced and displayed on said display unit, said radar image showing a relative position and a field of vision of said character and a relative position and a field of vision of a counterpart character which is possible to fight said character.

15 7. The image processing method according to claim 6, wherein when said character gets in the field of vision of said counterpart character, said radar image is changed in color.

20 8. The image processing method according to claim 1, wherein, in a scene where said character can selectively use one of items, said items are displayed so as to be scrolled in sequence.

25 9. A video game apparatus which displays on a display unit a character operated by a player and a scene image around said character, said apparatus comprising a scene image producing section which

0022457-031000

selectively produces one of a first scene image, a second scene image and a third scene image, and displays the produced one of said first, second and third scene images on said display unit, said first scene image subjectively viewed by said character while stopped in a movable
5 state, said second scene image subjectively viewed by said character while moving, and said third scene image objectively viewing said character and motion of said character.

10. The video game apparatus according to claim 9, further
10 comprising a sound effect producing section which produces different sound effects depending on which of said first, second and third scene images is displayed.

11. The video game apparatus according to claim 9, further
15 comprising a command accepting section which accepts a movement command from said player when one of said second and third scene images is displayed so that a moving image of said character is produced based on the accepted movement command, while refuses the movement command when said first scene image is displayed.

20

12. The video game apparatus according to claim 9, wherein said scene image producing section, upon detection that said character is located at a wall a region behind which can not be seen, produces a fourth scene image objectively viewing said character and said region.

25

13. The video game apparatus according to claim 12, further

character can selectively use one of items, displays said items so as to be scrolled in sequence for allowing said player to select one of said items.

19. The video game apparatus according to claim 9, wherein said
5 scene image producing section comprises an exchangeable memory and
a reading section for said memory, and wherein said memory stores
image element data necessary for producing said character and said
first, second and third scene images.

10 20. The video game apparatus according to claim 19, wherein said
image element data is element data for producing a three-dimensional
CG image.

21. A video game apparatus comprising:
15 a controller for operating motion of a character;
a scene image producing section which produces a image of the
character whose motion is operated by said controller and a scene image
which changes according to a position and the motion of said character,
and displays said character image and said scene image on a display
20 unit; and

a sound effect producing section which produces a sound effect
corresponding to the position and motion of said character,

wherein said scene image producing section produces a first
scene image when said character is stopped in a movable state and a
25 second scene image when said character is moved, said first scene
image subjectively viewed by said character and said second scene

0022467-021009

image objectively viewing the motion of said character, said scene image producing section displaying the produced one of said first and second scene images on said display unit, and

wherein said sound effect producing section produces different
5 sound effects depending on which of said first and second scene images is displayed.

22. The video game apparatus according to claim 21, further comprising a command accepting section which accepts a movement
10 command when said second scene image is displayed so that a moving image of said character is produced based on the accepted movement command, while refuses the movement command when said first scene image is displayed.

23. The video game apparatus according to claim 21, wherein said
15 scene image producing section, upon detection that said character is located at a wall a region behind which can not be seen, produces a scene image objectively viewing said character and said region.

24. The video game apparatus according to claim 23, further
20 comprising a command accepting section which accepts a command for movement of said character along said wall and produces a moving image of said character based on the accepted movement command.

25. The video game apparatus according to claim 21, wherein when
25 said character is hidden by a given thing in said second scene image,

34. The recording medium according to claim 32, wherein said subjective mode process and said bird's eye view mode process are switched therebetween based on an external command.

5

35. The recording medium according to claim 32, wherein when said character is hidden by a given thing in said bird's eye view mode process, said bird's eye view mode process is automatically switched to said intrude mode process.

10

36. The recording medium according to claim 32, wherein said program causes the computer to execute a process of accepting a command for movement of said character in each of said intrude mode process and said bird's eye view mode process so as to move said character, while refusing said movement command in said subjective mode process.

15

37. The recording medium according to claim 32, wherein said program causes the computer to further execute a behind mode process which, upon detection that said character is located at a wall a region behind which can not be seen, produces a scene image objectively viewing said character and said region.

20

38. The recording medium according to claim 37, wherein said program causes the computer to execute a process of accepting a command for movement of said character along said wall so as to move

25

said character.

39. The recording medium according to claim 32, wherein said program causes the computer to execute a process of producing a radar image and displaying said radar image on the display unit, said radar image showing a relative position and a field of vision of said character and a relative position and a field of vision of a counterpart character which is possible to fight said character.

10 40. The recording medium according to claim 39, wherein said
program causes the computer to execute a process of changing a color of
said radar image when said character gets in the field of vision of said
counterpart character.

15 41. The recording medium according to claim 40, wherein said
program causes the computer to produce a different sound effect when
the color of said radar image is changed.

42. The recording medium according to claim 32, wherein said
20 program causes the computer to execute a process of displaying a
plurality of items so as to be scrolled in sequence on the display unit,
said items selected and used by said character.

ABSTRACT OF THE DISCLOSURE

A video game apparatus produces a image of a player character whose motion is operated by a player and a scene image which changes
5 according to the motion of the player character, and displays the produced player character image and scene image on a display unit. The video game apparatus further produces sound effects according to the motion of the player character. The video game apparatus produces a first scene image subjectively viewed by the player character
10 when the player character is stopped in a movable state, and a second scene image objectively viewing the motion of the player character when the player character is moved, and displays the produced one of the first and second scene images on the display unit. The video game apparatus produces different sound effects depending on which of the
15 first and second scene images is displayed.

0022457-021900

FIG. 2

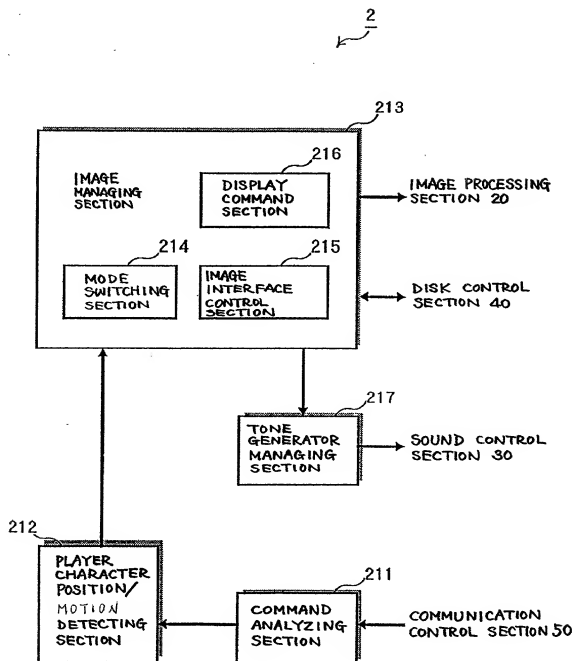


FIG. 3

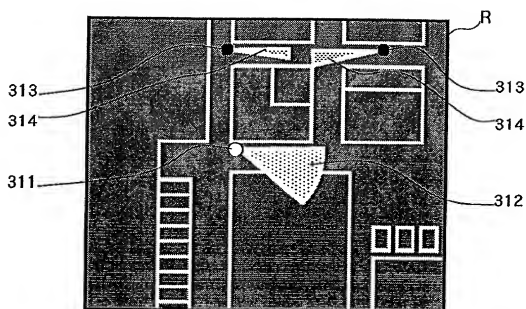


FIG. 4

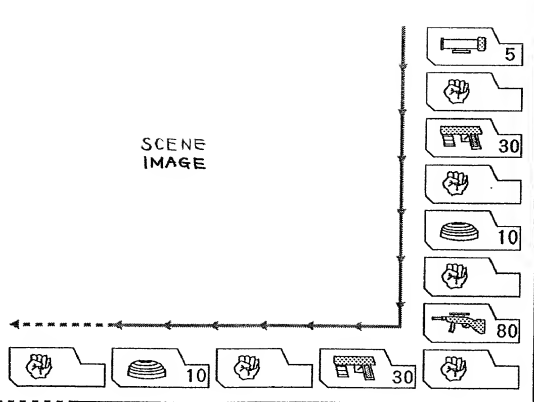


FIG. 5


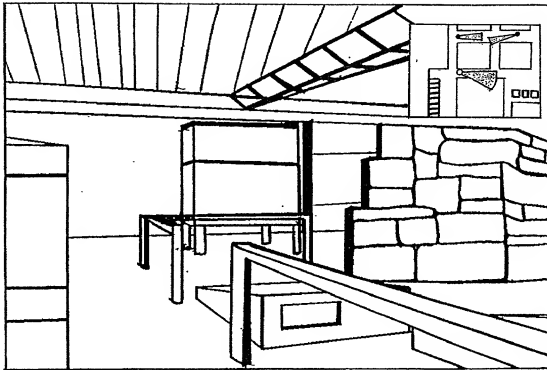


FIG. 6

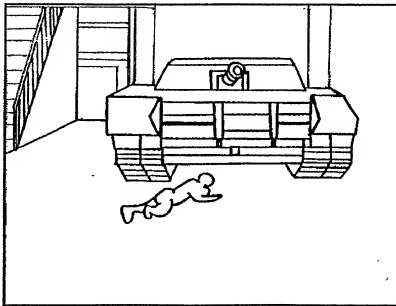

00272467-031000

FIG. 7


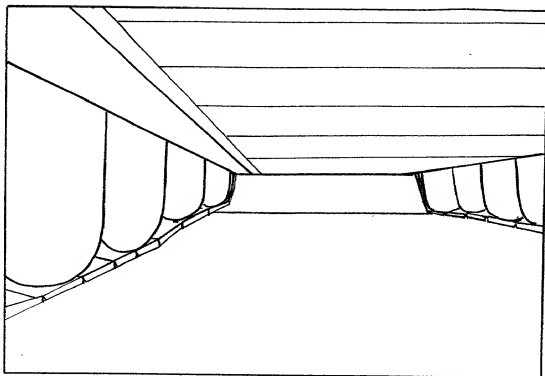


FIG. 8

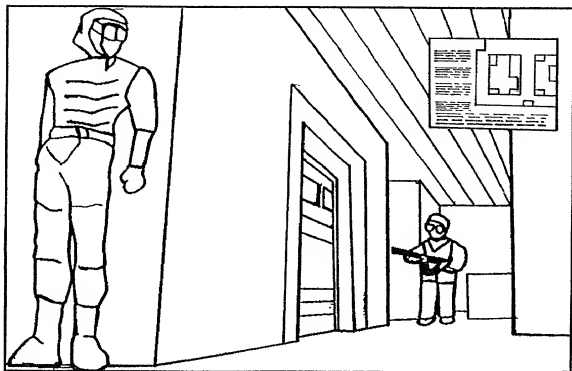

09272467-031999

FIG. 9

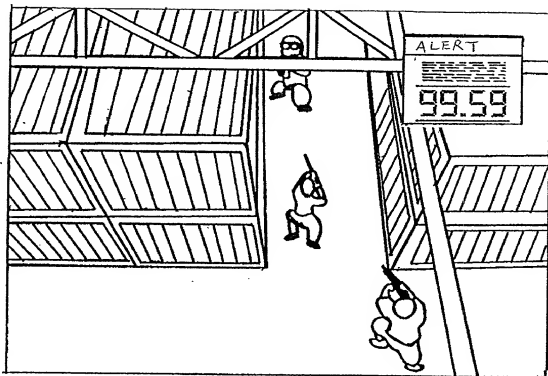


FIG. 10

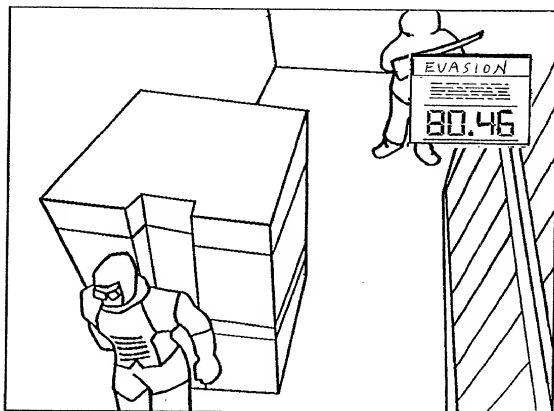


FIG. 11


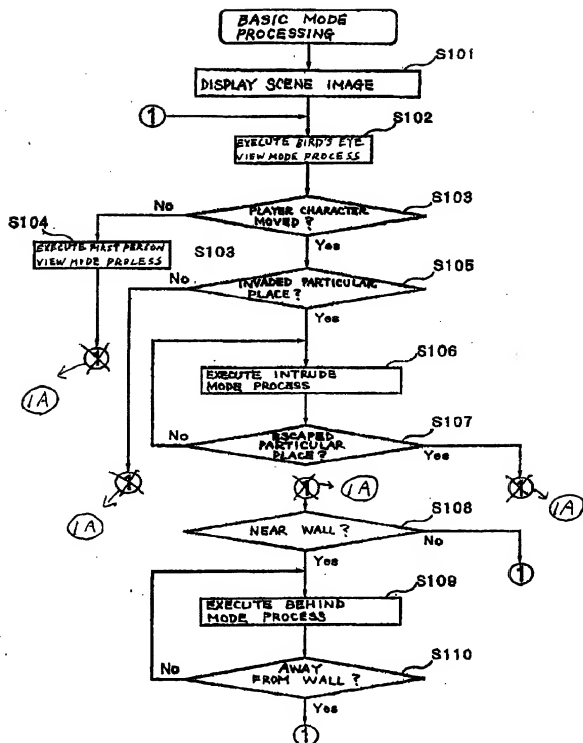


FIG. 12

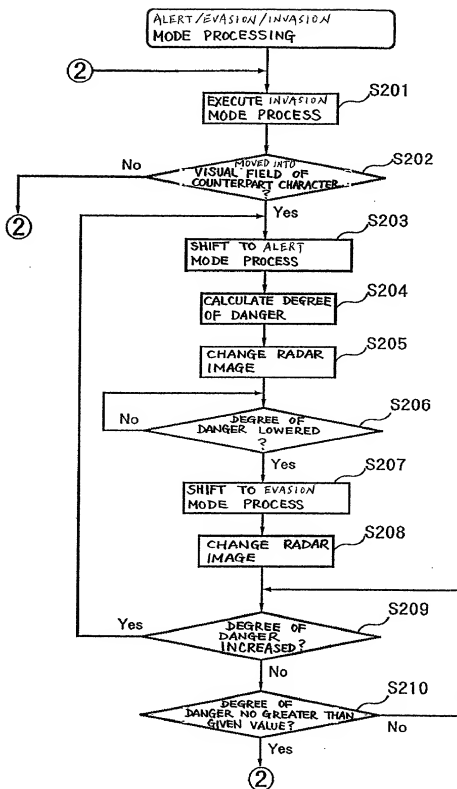

00272467.021000

DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION

ATTORNEY'S DOCKET NO.: WINX 3.0-008

As a below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

IMAGE PROCESSING METHOD, VIDEO GAME APPARATUS AND STORAGE MEDIUM the specification of which

☒ is attached hereto

☐ was filed on _____ as United States Application Number or PCT International Application Number _____ and was amended on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119(a)-(d) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below any foreign application for patent or inventor's certificate, or any PCT international application having a filing date before that of the application on which priority is claimed:

PRIOR FOREIGN APPLICATION(S)			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (month, day, year)	PRIORITY CLAIMED
JAPAN	10-70991	MARCH 19, 1998	YES <input checked="" type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>
			YES <input type="checkbox"/> NO <input type="checkbox"/>
LISTING OF FOREIGN APPLICATIONS CONTINUED ON PAGE 3 HEREOF <input type="checkbox"/> YES <input checked="" type="checkbox"/> NO			

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

Application Number:

Filing Date:

Application Number:

Filing Date:

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s), or § 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT international application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

U.S. Parent Application Serial Number:

Parent Filing Date:

Parent Patent No.:

U.S. Parent Application Serial Number:

Parent Filing Date:

Parent Patent No.:

PCT Parent Number:

Parent Filing Date:

LISTING OF US APPLICATIONS CONTINUED ON PAGE 3 HEREOF: ☐ YES ☒ NO

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Lawrence I. Lerner, Reg. No. 19,516, Sidney David, Reg. No. 22,768; Joseph S. Littenberg, Reg. No. 20,832; Arnold H. Krumholz, Reg. No. 25,428, William L. Mentlik, Reg. No. 27,108; John R. Nelson, Reg. No. 28,573; Roy H. Wagner, Reg. No. 28,350; Stephen B. Goldman, Reg. No. 28,512, Paul H. Kochanski, Reg. No. 29,680; Marcus J. Millet, Reg. No. 28,241; Bruce H. Sales, Reg. No. 32,783; Daniel H. Boos, Reg. No. 16,694; Keith E. Guinan, Reg. No. 36,137; Robert B. Cohen, Reg. No. 32,768; Arnold B. Dornien, Reg. No. 58,736; Michael H. Teschner, Reg. No. 32,692; Gregory S. Gewirtz, Reg. No. 38,522; Jonathan A. David, Reg. No. 36,494; Shawn P. Foley, Reg. No. 33,071; Thomas M. Palisi, Reg. No. 36,629; John P. Malden, Reg. No. 41,987; Kimberly V. Flügger, Reg. No. P-43,612; Jason I. Garbel, Reg. No. P-44,116; Renee M. Robeson, Reg. No. 41,777

SEND CORRESPONDENCE TO:
LERNER, DAVID, LITTENBERG,
KRUMHOLZ & MENTLIK, LLP
600 South Avenue West
Westfield, New Jersey 07090

DIRECT TELEPHONE CALLS TO:
(name and telephone number)

STEPHEN B. GOLDMAN, ESQ. Reg. No. 28,51
(908) 654-5000 Fax: (908) 654-7866

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name): Hideo Kojima

Inventor's signature _____ **Date** _____

Residence: Ota-ku, Tokyo, Japan Citizenship: Japanese
Post Office Address: 8-15, Kugahara 5-chome, Ota-ku, Tokyo 146-0085 Japan

Full name of second joint inventor, if any (given name, family name)

Second Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of third joint inventor, if any (given name, family name):

Third Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of fourth joint inventor, if any (given name, family name):

Fourth Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of fifth joint inventor (given name, family name):

Fifth Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of sixth joint inventor, if any (given name, family name):

Sixth Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of seventh joint inventor, if any (given name, family name):

Seventh Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

Full name of eighth joint inventor, if any (given name, family name):

Eighth Inventor's signature _____ **Date** _____

Residence: Citizenship:
Post Office Address:

☐ Additional inventors are being named on separately numbered sheets attached hereto.
194047_1.DOC